



Warning: Perform a bearing break-in procedure for new spindle.
Visit UgraCNC.com FAQ for details.

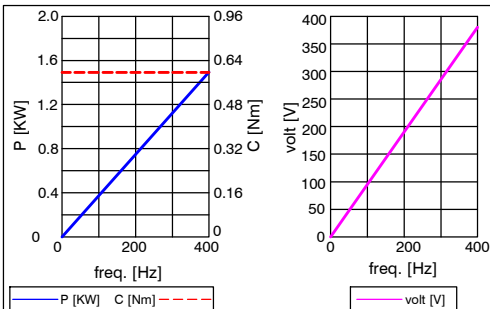

Voltage	V±10%	220		
Output Power	kW	1.50		
Current	A	6.5		
Frequency	Hz	400		
rpm	rpm	24000		
Torque	Nm	0.597		
Front Bearing				
Vost. Bearing				
Efficiency	η			
Power factor	$\cos\phi$	0.72		
Poles		2		
Service type		S1		
Insulation classoltage		F		
Cooling		Aria forzata		
Weight	kg			
Type of Protection	IP	54		

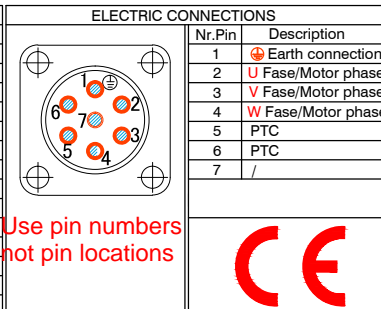

SFM3542C-24/1.50TMP-ER20

Mark	Change Description	Date:	Name
Design:	M.Z.HUANG	Date: 2013.03.01	Scale:
Check:	Y.H.HUANG	Date: 2013.03.01	Size: A4
Approv:		Date:	Page:

SFM3542C-ER20-DX-220V-24/400HZ-1.50KW/S1

MT 深谊

Drawing Ver : A4
Dimensions in mm

SY060120-2P0404